


Wireless Scanner



XL-9530

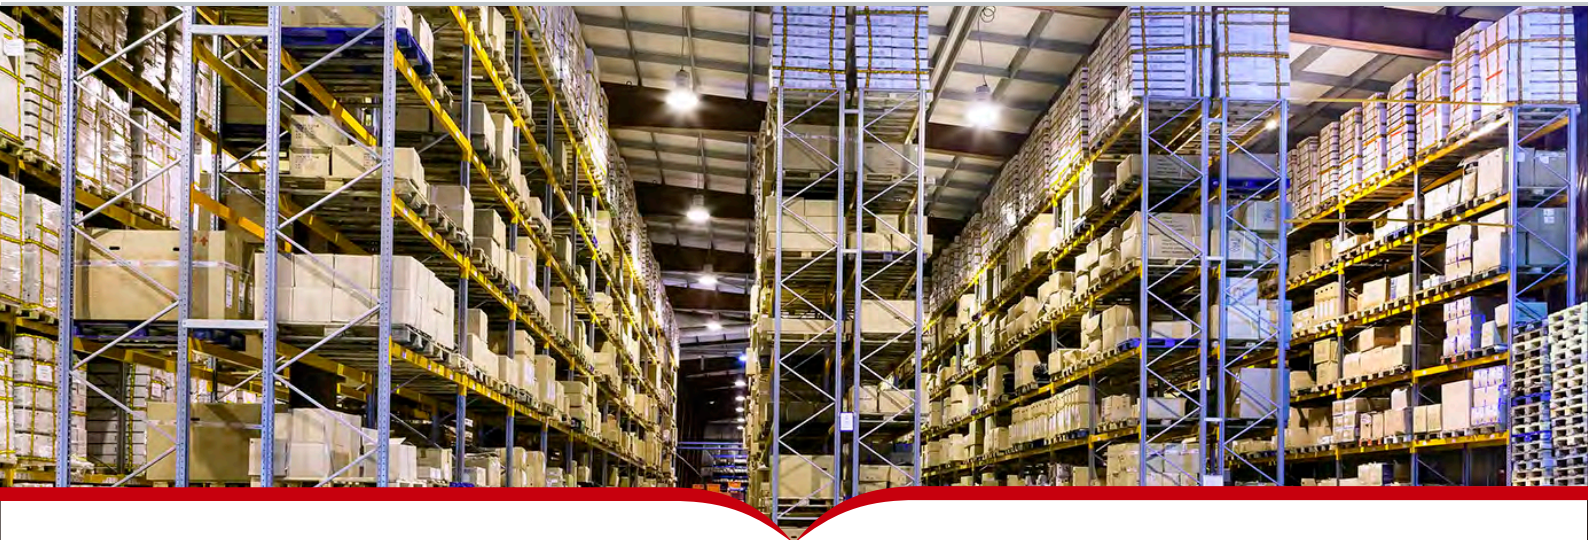

- ⊙ Support 1D/2D/RFID Reading
- ⊙ 600m Communication distance
- ⊙ Wireless inductive charge without cable
- ⊙ IP65 ; Unique industrial drop resistance design
- ⊙ With memory card inserted in scanner and can store 100000 EAN-13 barcode



Light Source	Red Light, LED, 625nm±10nm	Size	L × W × H:186mm × 66mm × 108mm
Scan Pattern	Single Scan & Manual & automatic	Charge Mode	Wireless charging
Working Frequency	433 MHz ISM frequency	Weight	854g
Communication distance	Up to 600m at open places	Material	ABS+PC
Scan Precision	4mil	Voltage	2200 mAh/DC 12V
RFID Frequency	13.56MHz,support14443A/B	Operating Current	300mA/35mA
Depth of Scan Field	50-260mm(EAN-13,13mil) 60-285mm(PDF417,15mil)	EMC	CE & FCC DOC compliance
Scan Angle	30° & 65° & 55°	Operating Temperature	- 20°C to 50°C
Support Interface	RS232,PS2 and USB	Storage Temperature	- 20°C to 60°C
Print Contrast	15% UPC/EAN 100%	Humidity	5% to 95% relative humidity
Mention Pattern	Buzzer, Indicator	Shock	2M drops
Decoding Capability	1D:Code128, EAN-13, EAN-8, Code39, UPC-A, UPC-E, Codabar, Interleaved 2 of 5, ISBN/ISSN, Code 93, UCC/EAN-128, GS1 Databar etc. 2D:PDF417, QR Code, DataMatrix		



SUNLUX IOT Technology (Guangdong) Inc.

Office Add: 4F,No.7 ,Kehui First Street ,Science Road,Science City,Guangzhou,China

Tel: +86-20-32053765 Fax: +86-20-82115390 Site: www.xl-scan.com E-mail: sales@xl-scan.com